

Cummins KTA 38 G3	CGT Stamford HCI 634	Generator Model:	G1005SCU5
----------------------	-------------------------	---------------------	------------------

50 Hz	3-Phase	Power Factor Cos Φ = 0.8	Emissions Non-Certified
-------	---------	----------------------------------	----------------------------

RATINGS	PRIME POWER (PRP)		STANDBY POWER (ESP)		
	G1005SCU5				
	kVA	kWe	kVA	kWe	Amps
Voltage					
415/240	900	720	1000	800	1391
400/230	900	720	1000	800	1443
380/220	900	720	1000	800	1519

Definition of Ratings & Reference Conditions


Prime Power (PRP) is the nominal output continuously available, where the average load (variable) does not exceed 70% of the prime power rating during an operating period of 250 hours. The total operating time at 100% prime power must not exceed 500 hours per year. A 10% overload is available for a maximum of 1 hour in 12 hours of operation and must not exceed a total of 25 hours per year.

Standby Power (ESP) is the maximum output available (at variable load), for up to 200 hours per year. The average load (variable) must not exceed 80% of the standby power rating, with less than 25 hours per year at the full standby rating. No overload is available. The genset must not operate, at standby rating, in parallel with the public utility under any circumstances.

Standard Reference Conditions: air temperature 25°C (77°F), barometric pressure 100kPa [110m (361ft) altitude], 30% relative humidity.


Note: The above ratings may be subject to derate at different operating conditions. Please see the Derate Guidelines on the Broadcrowm website.

All power ratings and reference conditions in accordance with ISO 8528-1 and ISO 3046-1.



Key Features:

- Efficient water cooled diesel engine.
- Single bearing CGT Stamford alternator
- Radiator with pressure cap and drain point
- Fully guarded engine-driven fan
- Fully welded steel baseframe with lifting / jacking points
- Various fuel system options
- Heavy duty rubber anti-vibration mountings
- 24V starter batteries and connecting cables
- Separate engine-driven battery charging alternator
- Spin on oil and fuel filters and dry type air filter element
- Industrial silencer(s) supplied loose
- Auto Start control system with digital instrumentation
- Main line circuit breaker
- Factory Test Certificate
- Operation & Maintenance Manual
- Wide range of optional extra features available

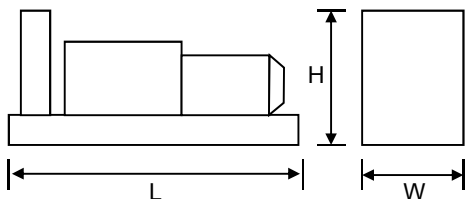

Overall Dimensions & Weights - Open Set
Length (L) = 4675mm
Width (W) = 1752mm
Height (H) = 2432mm
Dry Weight (inc oil) = 7853kg
Operating Weight = 8214kg

Overall dBA	Typical Open Generator Noise Level at 1m, Free Field (dB)							
	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
108	98	101	102	104	103	102	97	96

All specifications and design are subject to change without notice



G1005SCU5

Jan 2017

ENGINE & COOLING SYSTEM CUMMINS KTA 38 G3

		SI Units	PRIME	STANDBY
Performance	Engine Speed	r/min	1500	
	Gross Power	kWm	806	895
	Fan Power	kWm	20	20
	Net Power	kWm	786	875
	Emissions Certification		—	
	Altitude Capability	m	1220	1220
General	Cylinders / Type		12 cyl / 60° Vee / 4-stroke	
	Aspiration / Charge Cooling		Turbocharged / JWAC	
	Governing / Engine Management		Electronic Governor / ECU	
	Bore / Stroke	mm	159 / 159	
	Cubic Capacity	litres	37.8	
	BMEP	kPa	1702	1890
Fuel	Fuel Consumption at 100% Power	litres/h	198	221
	Fuel Consumption at 75% Power	litres/h	151	168
	Fuel Consumption at 50% Power	litres/h	104	116
	Total fuel flow	litres/h	454	
	Standard Fuel Tank Capacity	litres	N/A	
Air	Engine Air Flow	m³/s	0.925	1.000
	Maximum Air Intake Restriction (used filter)	kPa	6.23	
Exhaust	Exhaust Gas Flow	m³/s	2.52	2.78
	Exhaust Gas Temperature	°C	560	570
	Maximum Exhaust Back Pressure	kPa	10.2	
	Typical Exhaust Pipe Diameter	mm	250	
Cooling	Radiator Cooling Air Flow	m³/s	18.7	
	Max Restriction to Cooling Air Flow	Pa	130	
	Max Radiator Air-On Temperature	°C	50	
	Maximum Coolant Temperature	°C	104	
	Coolant Capacity - Engine Only	litres	124	
	Total Coolant Capacity	litres	219	
Oil	Total Oil Capacity incl Filters	litres	135	
	Typical Oil Pressure at Rated Speed	kPa	380	
	Typical Oil Consumption (>250hrs Operation)	litres/h	0.52	
Thermal	Heat Rejection to Engine Cooling Water	kW	490	550
	Heat Rejection to Charge Cooler	kW	n/a	
	Heat Radiated From Engine (Typical)	kW	110	130
Elec	Electrical System Voltage	V	24	
	Battery Type		2 (Series) 624	
	Battery Capacity SAE CCA	A	1010	

ALTERNATOR CGT STAMFORD HCI 634

		SI Units	PRIME	STANDBY
General Data	Manufacturer		Cummins Generator Technologies - STAMFORD	
	Model (may vary with voltage)		HCI 634 G	HCI 634 G
	Operating Temperature	°C	40	27
	Coupling / No. of Bearings		Direct / Single Bearing	
	Phase / Poles / Winding Type		3-Phase / 4-Pole / Winding 311	
	Power Factor		Cos Φ = 0.8	
	Excitation		Separately excited by PMG	
	Insulation System		Class H	
	AVR Type		MX 341	
	Voltage Regulation		± 1.0%	

All specifications and design are subject to change without notice



G1005SCU5

Jan 2017

STANDARD CONTROL SYSTEM BC 7210 Digital Auto Start

The standard control system for Export products is **BC 7210** (photo), based on the Deep Sea Electronics DSE7210 Digital Auto Start controller.

This provides for the manual and automatic remote start of the generator with a LCD digital display of :

- Coolant Temperature, with integral high temperature protection
- Oil Pressure, with integral low pressure protection
- Volts, Amps and Frequency
- Engine operating hours
- Battery volts

Also featuring :

- Automatic cool-down timer function
- Emergency Stop button
- Ample auxiliary inputs/outputs for optional features
- Optional - battery charger and door mounted illuminated switch.



CONTROL SYSTEM OPTIONS

BC 7310 & BC 7320 control systems (just the DSE modules shown here) provide complete power monitoring and protection facilities. Compared to BC 7210, addition features include :

- Pre-alarms for Low Oil Pressure and High Coolant Temperature
 - Digital display of kW, kVA and Power Factor
 - Under/Over Volts protection
 - Over Current Protection
 - Full RS485 Telemetry implementation as well as full SAE J1939 CANBus implementation.
- In fact, all generating sets driven by engines with onboard ECU/CANBus come with this system as standard.



The BC 7320 provides full AMF functionality with integrated mains monitoring and generator/mains contactor control.



Finally, **BC 8610 & BC 8620** control systems provide the same features as BC 7310 & BC 7320 respectively, plus :

- BC 8610 - Set-to-Set Synchronisation
- BC 8620 - Single Set-to-Mains Synchronisation with integrated mains monitoring

For Multi Set-to-Mains synchronisation, each set requires BC 7510 with the addition of one mains monitoring panel **BC 8660** (not illustrated). See the Synchronisation Guidelines for further details.

CONTROL SYSTEM OPTIONS - X-RANGE

The X-Range of control systems has been developed to suit larger generating sets (>500kVA) for the UK and Projects market.

The entry level is **Remote Start** and provides for the manual and automatic remote start of the generator with LCD digital display all operating parameters including :

- Coolant temperature with high temperature alarm and shutdown
- Oil pressure with low pressure alarm and shutdown
- Engine operating hours, battery charge volts and amps
- Volts, with Under/Over Volts protection
- Amps, with Over Current protection
- Frequency, kW, kVA, Power Factor

The **Automatic Mains Fail** variant adds full AMF functionality with integrated mains monitoring and generator/mains breaker control.

The **Generator Parallel** system makes provision for set-to-set synchronisation, whilst the Mains Parallel version allows single set-to-mains synchronisation with integrated AMF functionality.

By means of the **Multi-Set Mains Parallel** system (not illustrated) a number of sets can be synchronised with each other and the mains supply.



All designs and specifications subject to change without notice